

TENSIOMETER

**** code 1837B_C ****

Universal tension meter for a variety of applications in the textile and wire industries, with bigger rollers for universal use. 2 Tension ranges available; 1- 200 cN and 1- 500 cN.

Hand-held device with large guide rollers groove Ø 12 mm for yarns up to 200 tex and wires Ø 0.28 mm.



Special Features

- Tension meter ZEF with easy to read LCD display
- Coloured, backlight TFT display with 3 different display modes
 - numeric
 - numeric with live bargraph
 - numeric with graph (time-tension)
- The display rotates in 90° steps for better reading
- Automatic “Zero-Setting” in each measuring position using a special sensor technique
- Selectable units of measurement: cN, g, N and lb
- Very high data sampling rate (internal 1 kHz)
- Storage of MIN, MAX, last reading, average and standard deviation per measuring interval
- User-set MIN and MAX alarms with indication of TFT display if reading is out of limits
- Adjustable electronic damping for better reading when tension fluctuates
- 3 separate calibration material memory locations for custom calibrations
- Menu set-up in English, German, Spanish and French language
- Slim filament guide with small guide rollers – ideal for limited access space
- Simple, trouble free operation
- Filament guide and unique roller shifting mechanism ensure easy acquisition of the running material
- Light weight hand-held unit

Standard Features

- Everything in operator’s view:
 - the guide rollers
 - the measuring material
 - the readings
- Ball-bearing mounted, V-grooved guide rollers
- Tension meter with high-strength plastic housing
- LiPo accumulator (approx. 25 hours continuous operation) with AC adapter
- CE approved (tested for electromagnetic compatibility)


*Photographs and descriptions of the present leaflet have to be considered as purely indicative and not binding.
*Le immagini e le descrizioni del presente catalogo sono da ritenersi puramente indicative e non vincolanti.

TENSIOMETER

**** code 1837B_C ****

- Certificate of Compliance with the order 2.1, according EN 10204, included.
- Optionally available: Calibration report, code 1836.CC1.
- Optionally available: Inspection Certificate 3.1, according EN 10204, with calibration report, code 286.CC2.

Display with many possibilities

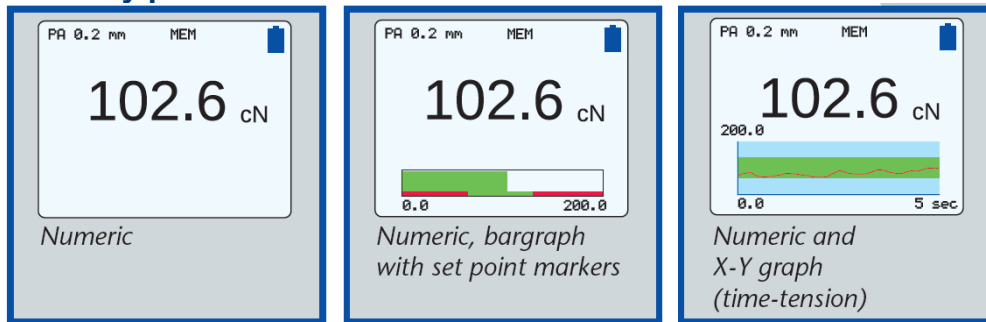

TFT-Display with 3 different display modes



Depending on the measuring position the TFT display is automatically rotating in 90° steps.

Available Models

MESDAN code	Model	Measuring Range	Resolution	Measuring Head Width*	Calibration Material**
1837B	ZED-200	1.0 – 200.0 cN	0.1 cN	63 mm	PA: 0.20 mm Ø
1837C	ZED-500	1 – 500 cN	1 cN	63 mm	PA: 0.20 mm Ø

Other units of measure are available, such as g.

* Width of filament guide

** Suitable for 95 % of applications – PA = Polyamide Monofilament

Calibration to customized material:

If process material differs significantly from the calibration material in diameter, rigidity or shape, special calibration using customer supplied samples is recommended. For this purpose a material sample of about 5 m should be supplied.

Guide rollers

Order-Code	Line Speed v_{max} ... m/min	Roller Material
Standard	2000	Hard-coated aluminium

*Photographs and descriptions of the present leaflet have to be considered as purely indicative and not binding.
*Le immagini e le descrizioni del presente catalogo sono da ritenersi puramente indicative e non vincolanti.

TENSIOMETER

**** code 1837B_C ****

Code K	3500	Hard-coated aluminium
Code H	5000	Plasma-coated aluminium
Code T	1000	Plastic (POM) black
Code W	1000	Aluminium ceramic-coated
Code CE2	1000	Aluminium ceramic-coated

Standard accessories



USB AC adapter with 4 adapters (EU/USA/UK/AUS-NZ) for 100 – 240 V AC and charging cable for loading the accumulator



Inspection Certificate 3.1 according DIN EN 10204 including a calibration report is optional available, code 286.CC2.



Delivery includes

Tension meter ZEF with carrying case, USB AC adapter with 4 adapters (EU/USA/UK/AUS-NZ), charging cable, operating instruction in German or English (as requested), Certificate of Compliance with the order 2.1 according EN 10204 free of charge.

Specifications

Calibration:	According to SCHMIDT factory procedure
Accuracy:	± 1 % full scale ± 1 digit or better typical ± 0.5 % full scale
Measuring Units:	cN, g, N or lb, switchable
Overrange:	Approx. 10 % full scale, without accuracy guarantee
Overload protection:	200 % full scale
Measuring principle:	Strain gauge bridge
Measuring roller deflection:	Max. 0.5 mm
Signal processing:	Digital

*Photographs and descriptions of the present leaflet have to be considered as purely indicative and not binding.
*Le immagini e le descrizioni del presente catalogo sono da ritenersi puramente indicative e non vincolanti.

TENSIOMETER

**** code 1837B_C ****

Damping:	Adjustable electronic damping, averaging
Sampling rate internal:	Approx. 1 kHz
Sampling rate:	250 Hz (250 readings/sec)
Display:	Colour-TFT 128 x 160
3 different displays:	Numeric Numeric with live bargraph Numeric with graph (time-tension)
Display update rate:	2 times per second
Memory:	Last, AVG, MIN, MAX, STD Dev
Auto power off:	After 3 minutes of non-use
Temperature range:	10 – 45 °C
Air humidity:	85 % RH, max.
Power supply:	LiPo accumulator (approx. 25 h continuous use, charging time approx. 3.5 h), USB AC adapter 100...240 V AC with 4 adapters (EU/USA/UK/AUS-NZ)
Housing material:	Plastic (POM)
Dimensions (L x W x H):	157 x 85 x 32 mm
Weight, net (gross):	Approx. 200 g (approx. 600 g)
<p>Specifications subject to change without notice! *Photographs and descriptions of the present leaflet have to be considered as purely indicative and not binding. *Le immagini e le descrizioni del presente catalogo sono da ritenersi puramente indicative e non vincolanti.</p>	

*Photographs and descriptions of the present leaflet have to be considered as purely indicative and not binding.
*Le immagini e le descrizioni del presente catalogo sono da ritenersi puramente indicative e non vincolanti.